


Nouvelle génération / New generation



CT 3000 B



Video CT 3000 B.

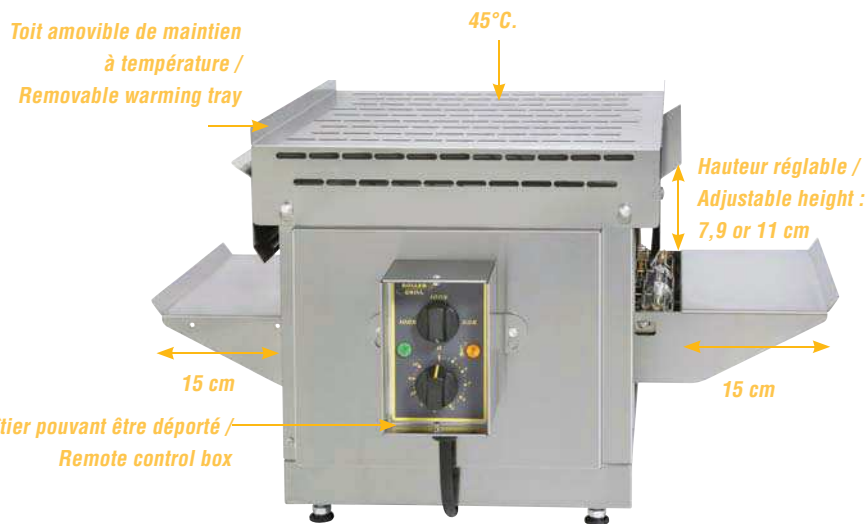

Four convoyeur infrarouge (1050°C) CT 3000 B®

Infrared (1050°C) conveyor oven CT 3000 B®

Idéal pour une utilisation intensive en franchises, fast-foods et chaînes de boulangeries !

Temps de passage mini : 47 s / Temps de passage maxi : 2,30 min.

Cuisson sans préchauffage et en continu de tous snacks : **1'30 en moyenne ! Remise en température** de gaufres et viennoiseries en quelques secondes.

Maintien à température en partie supérieure.

Grande flexibilité d'utilisation, 3 réglages :

- La vitesse de rotation du tapis selon le produit à cuire
- La puissance de chauffe (demie ou pleine puissance)
- La hauteur de passage de 7 à 11 cm grâce aux réflecteurs inox.

Très compact (72 cm), superposable, **boîtier déporté (cordon d'1 m)**.

Entretien facile : le toit et les 2 bacs récupérateurs entièrement amovibles.



Croissants 50 s



Pizzas Ø 30 cm 1'30 min / Mini-pizzas 50 s



Panini, sandwiches, toasts, bruschetta 1'30 min



Croque-monsieur 1'30 min

Ideal for intensive use in bakery, fast-food chains and franchises !

Minimal cooking time: 47 s / Maximal cooking time: 2,30 min.

Non-stop cooking with no preheating for every snack: **1'30 min in average !**

Reheating of waffles, croissants and pastries.

Warm keeping on the holed top tray.

Great flexibility, 3 regulations:

- The speed of the conveyor belt according to the products
- The heating power (half or full power)
- The height of the tunnel from 7 to 11 cm thanks to the reflectors

Very compact (72 cm), **stackable**, a **remote control box** (1 m long cord).

Easy cleaning: he roof and both trays collectors are completely removable.

Features:

Protection grid (patented), roof as snack support, quartz tubes selector, speed control, stainless steel conveyor belt, front and back trays of 15 cm, pilot lights, ventilated motors, adjustable feet, small cleaning brush for conveyor belt.

Option: stainless steel support (475 x 360 x 300 mm)

Ref.	Puissance Power	Dimensions hors tout Outside dimensions	Surface de cuisson Cooking area	Hauteur utile Inside height	Poids Weight	Volts
CT3000 B	3 kW	470 x 720 x 385 mm	300 x 370 mm	70 à 110 mm	22 kg	230 V